



FEED AND BIOFUEL

DOUBLE AGITATOR MIXERS

FOR HIGH INTENSITY MIXING



For high intensity mixing in demanding applications such as slurries for ethanol production, dryer conditioning in corn wet milling, and industrial processes.

STANDARD FEATURES

- Adjustable speed, retention time, mixing intensity
- Even discharge of product


- Compact design can be installed in areas with limited overhead space
- Dual agitator shafts with adjustable paddles on a helix
- Outbound pillow block bearings helps prevent contamination
- Speed switch
- Gas purged lantern rings
- Heating/cooling jacket
- Special finishes
- Liquid addition parts

OPTIONS

- Variable speed drive
- Abrasion resistant paddles

ANDRITZ

ENGINEERED SUCCESS

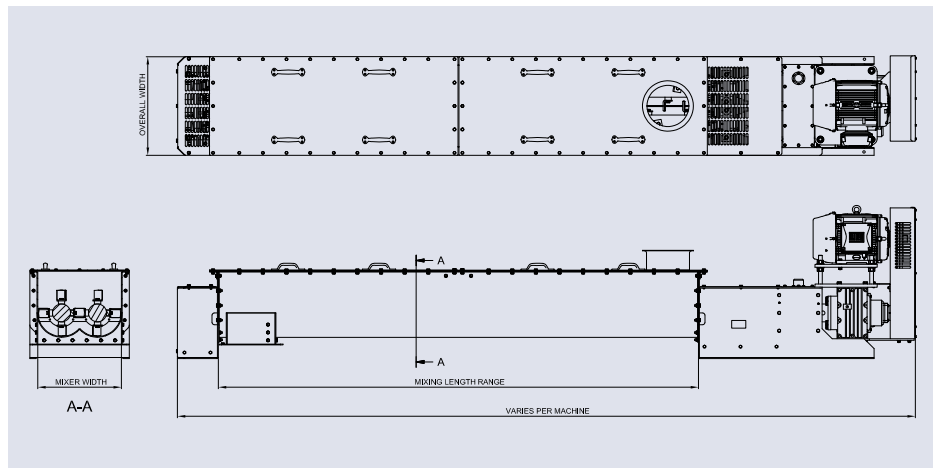

TECHNICAL DATA - DA MIXER

Model	Mixing Length range		Power range		Weight range		Mixer width		Overall width	
	ft	m	HP	kW	lb	Kg	in	cm	in	cm
DA12	4.5 - 8	1.4 - 2.4	1 - 5	0.7 - 3.7	904 - 1117	410 - 507	12"	31	15"	38
DA21	6 - 12	1.8 - 3.7	5 - 15	3.7 - 11.2	1702 - 2340	772 - 1061	21"	53	24 7/8"	63
DA30	10 - 18	3.0 - 5.5	15 - 40	11.2 - 30	3936 - 5532	1785 - 2509	30"	76	41 1/2"	105
DA40	10 - 20	3.0 - 6.1	40 - 75	30 - 56	6383 - 9043	2895 - 4102	40"	102	50 1/2"	128



All data, information, statements, photographs and graphic illustrations in this leaflet are without any obligation and raise no liabilities to or form part of any sales contracts of ANDRITZ AG or any affiliates for equipment and/or systems referred to herein. © ANDRITZ AG 2018. All rights reserved. No part of this copyrighted work may be reproduced, modified or distributed in any form or by any means, or stored in any database or retrieval system, without the prior written permission of ANDRITZ AG or its affiliates. Any such unauthorized use for any purpose is a violation of the relevant copyright laws. ANDRITZ AG, Stattegger Strasse 18, 8045 Graz, Austria.



1 0319