


Filter

Type EFF30WB

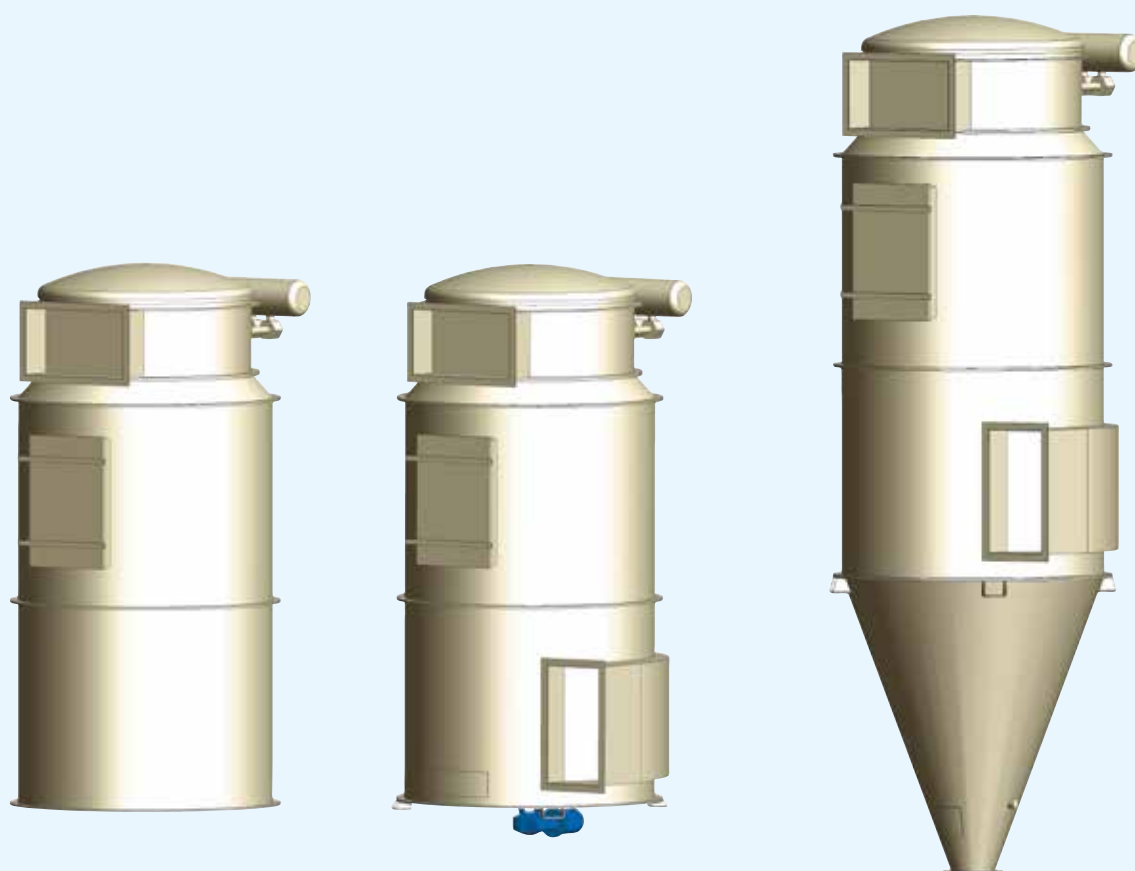

Filter of optimum design for efficient dust separation at low operating cost.

Filter type EFF-WB is used for removal of dry dust, especially in large quantities, abrasive dust, or dust with low rates of fall. The product range consists of a fully automatic, continuously operating bag filter cleaned by compressed air and built in series, containing from 10 to 260 bags meas-

uring from 1,200 to 4,800 mm in length. Filter areas from 4 to 470 m².

By combining the best, tested components with newly developed cleaning nozzles providing optimum flow, a hitherto unseen low energy consumption has been achieved for compressed air cleaning of filter bags. The EFF-WB filter is designed as insertable,

cased or free-standing filters with cone or scraper bottom.

Filter

Type EFF30WB

Compressed air cleaning of filter bags

Optimum adjustment of cleaning pressure and -cycles to every specific job ensures efficient dust separation, low emissions, and long filter bag life.

Filter media


Top-quality filter media selected for specific applications based on requirements relating to service life, emissions, differential pressure, and so on.

Filter bag changing

The filter bags can be changed either from the clean air side or the dusty air side.

Accessories and special equipment

- Electronic controls with advanced functions and energy-saving Δp operation
- Emission metering equipment
- Rotary valves
- Manufactured in alternative steel qualities and with alternative surface treatment
- Platforms, ladders, supports, dust containers
- Insulation, heating
- Designed for high temperature and underpressure
- Explosion protection documented acc. to EN14491

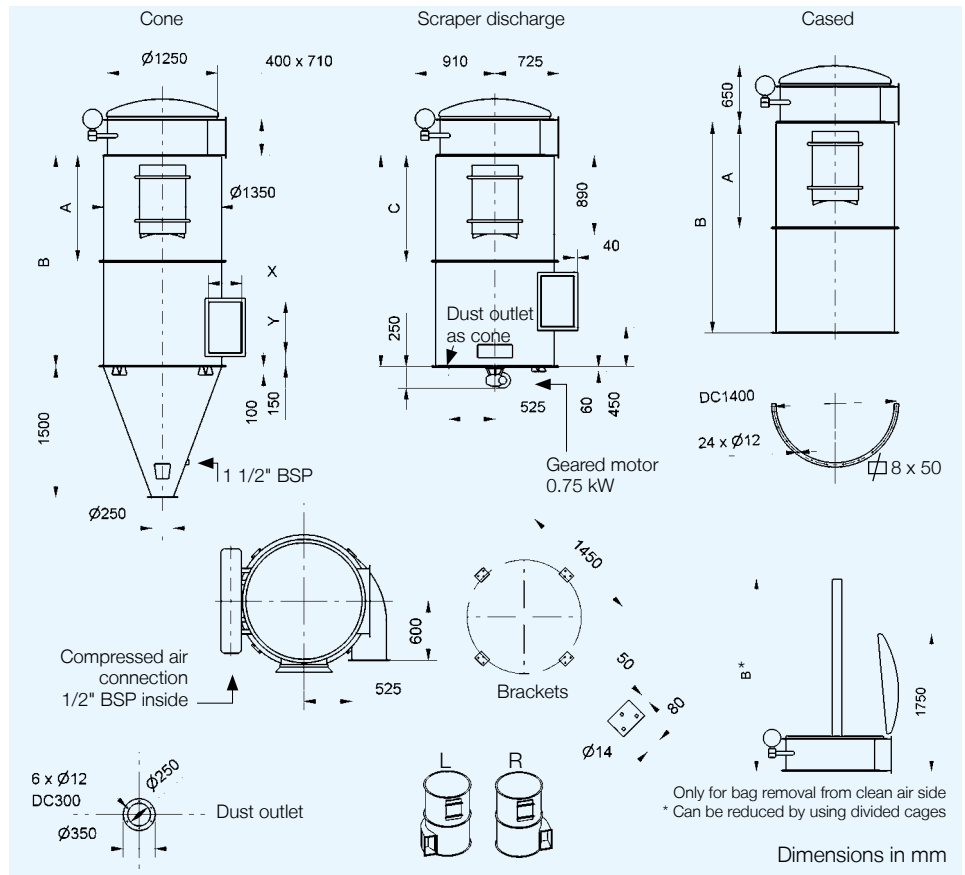

Inlet dimensions

Air volume [m ³ /h]	X	Y
1300 - 2300	210	210
2000 - 3700	210	335
2800 - 5000	210	460
4400 - 8000	335	460
7700 - 14000	460	585

Technical data

Filter Type EFF	Filter area m ²	Dimensions mm				Compressed air		Weight kg		
		A	B	C	D	NI/min *	Hopper	Total sep.	Cased	Insertable
30/1200	14		1200		1500	55	625	670	455	290
30/1800	20		1800		2100	55	715	765	535	310
30/2400	27		2400	1200	2700	70	800	845	615	330
30/3000	34	1500	3000	1500	3300	70	920	965	720	350

* at 180 sec. cycle

ANDRITZ Feed & Biofuel A/S

Glentevej 5-7
6705 Esbjerg, Denmark
Phone: +45 72 160 300
andritz-fb.dk@andritz.com
www.andritz.com/ft