

New Recovery Boiler Concept

Ultra-Low Emissions, Maximum Energy Efficiency

As part of its CircleToZero initiative to reduce emissions and waste at pulp mills, ANDRITZ never stops innovating to obtain maximum results. One of the latest developments for pulp mills has resulted in a new recovery boiler concept with low emissions while maintaining high energy efficiency at the same time.

The recovery boiler has come a long way since it was first invented in the early 1930s. At the time it was a revolution and is now often described as the "beating heart of a pulp mill", as it performs its duty of recovering the inorganic chemicals, burning organic chemicals so they are not discharged from the mill as pollutants, and recovering heat in the form of steam to generate power.

Over the years, that first revolutionary recovery boiler design has developed and evolved into a showcase of sustainability for all pulp mills around the world. Hamilton Brandao, Technology Director, Recovery Boilers, ANDRITZ, says, "The recovery boiler design and function has come a very long way since its invention back in the 1930s. Safety, mechanical design, process performance, opera-

tional controls, and environmental emissions make the modern recovery boiler unrecognizable when compared to the first ones.

"Over the past two decades, in particular, recovery boiler capacity has increased steadily, while thermal performance improvement has enabled customers to not only be self-sufficient in power generation, but also create a valuable new revenue stream by selling surplus green energy to national grids."

NOX EMISSIONS: THERE IS STILL MORE WORK TO BE DONE

The modern recovery boiler may be a showcase of sustainability, but there are still some areas that need working on, in particular, NOx emissions. NOx emissions are becoming strictly monitored as they impact the environment in the long term and most countries have their own rules on allowed emissions. One example is China, which has recently seen a rapid tightening of NOx emission regulations in high density urban areas. It is expected that Europe will follow suit in regards to NOx emissions, leading to similar limits.

"In general, environmental emissions from the recovery boiler have decreased substantially over the last decades, for instance CO₂, particulates and low sulfur emissions," continues Brandao. "But this trend is not applicable to NOx, which still requires new technologies to enable a further decrease in its emissions."

The challenge of NOx emissions from the recovery boiler is an area that ANDRITZ has been working on over the last two years and has successfully come up with a solution. Naveen

"After testing different technologies, we have now devised proven ways to reduce NOx emissions from the recovery boiler by as much as 95%."

Naveen Chenna
Director of Research and Innovation
ANDRITZ



Chenna, Director of Innovation and Research at ANDRITZ, says, "More than 70% of the NOx coming from a pulp mill emits from the recovery boiler. This means if a pulp mill produces 1.5 kg of NOx per tonne of pulp, about 1.2 kg is coming from the recovery boiler.

"For the last two years we have built and operated a demo plant containing various solutions at pulp mills in Finland along with earlier studies in Sweden. After testing different technologies including electrostatic precipitators (ESP), fabric filters (FF), and catalysts, we have devised proven ways to reduce NOx emissions from the recovery boiler by as much as 95%."

THE TECHNOLOGY – HOW IT WORKS

The dramatic reduction of NOx emissions is made possible by secondary methods that ANDRITZ experts have configured by using a FF for recovery boiler dust after the ESP and selective catalytic reduction (SCR). The FF ensures low dust emission and safe operation of the SCR. There are no other references of this configuration in the pulp indus-

try worldwide, with the demo plant tests showing normal collection and release of the dust on the fabric surface.

Kasper Skriver, Global Product Manager ESP and FF, ANDRITZ, explains, "The reduction or elimination of NOx is made possible by secondary methods that can be designed to reach 95% efficiency of reduction. Particulate reduction can be achieved down to 5 to 10 mg/Nm³ with conventional ESP technology. Typical levels today range from 10 mg/Nm³ in China all the way up to 70 mg/Nm³ in Brazil.

"By applying the fabric filter technology, we will enable continuous particulate emissions less than 5 mg/Nm³, which is what we consider close to zero."

The technology for NOx reduction and elimination, the Lo-NOx recovery boiler concept, is now available for ANDRITZ customers worldwide, and can be part of a greenfield mill project or retrofitted to existing mill operations.

CONTACT


Hamilton Brandao
hamilton.brandao@andritz.com

CONTACT

Naveen Chenna
naveen.chenna@andritz.com

CONTACT

Kasper Skriver
kasper.skriver@andritz.com

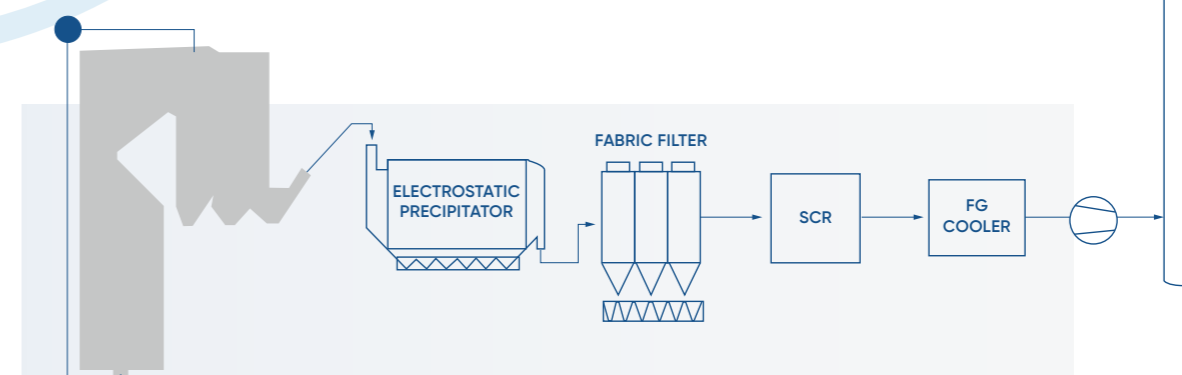

The innovative Lo-NOx recovery boiler concept combines various well-proven ANDRITZ technology solutions to achieve minimum dust and NOx emissions from the boiler.