



FEED & BIOFUEL PELLET MILL TYPE ACM7700

DURABLE PELLET MILL WITH ENHANCED PERFORMANCE AND SAFETY

This pellet mill delivers high performance and durability with an enhanced gearbox for smoother operation. Top-quality bearings and seals ensure longevity, while the stainless steel pellet chamber offers corrosion resistance.

Quick die and roll changes reduce downtime, and a trapped key interlock boosts safety. The compact design adapts to diverse applications with cost-effective components and optimal performance.

- Enhanced performance
- Durability
- Quick die & roll changes
- Safety features with interlock system
- Compact & cost-effective design

ANDRITZ

STANDARD FEATURES


- Enhanced gearbox for optimal function and quieter operation.
- Bearings and seals are used from industry leading manufacturers ensuring best quality.
- Stainless steel pellet chamber with stainless gearbox liner ensures high corrosion resistance and dust containment.
- High quality components designed for cost effective replacements.
- Die and roll changes designed for quick and easy changeover.
- Trapped key interlock for Pellet mill door and safety.
- Forced lubrication and filtration supplied by integrated lubrication system.

ADDITIONAL FEATURES AND BENEFITS

- Variety of high-quality die and roll shell designs to suit the application.
- Compact and cost-efficient design.

OPTIONS

- Manual, pneumatic, or electric Hoist with tools to assist with die and roll assembly changes.
- Force feeder option available.
- Manual or Air operated (which can be tied to control system) Quick dump feed chute.
- Conditioner with optional liquid addition ports. (Varying size and length to fit existing installment – custom options available)
- Feeder with magnetic discharge. (Varying size and length to fit existing installment – custom options available)
- Oil cooling system available.
- Different drive speeds available.

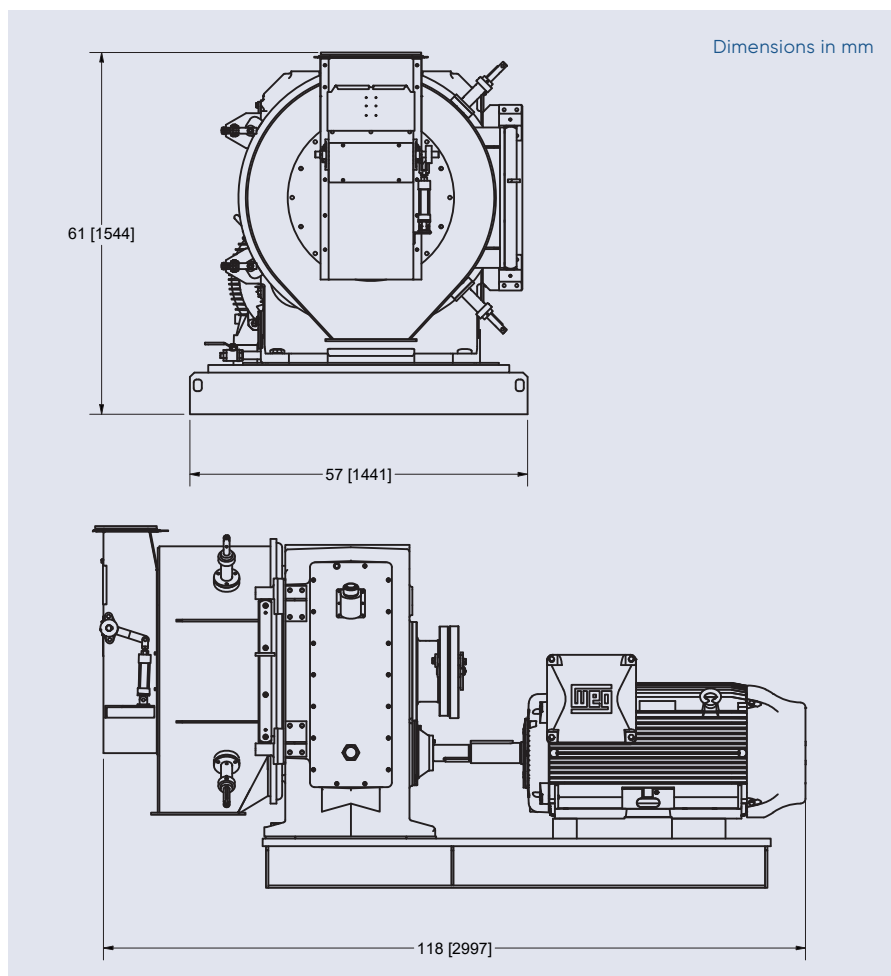

TECHNICAL DATA

PELLET MILL ACM7700

Model	ACM77226	ACM77267	ACM77306	ACM77308
HP Range	200-250	250-300	250-300	250-300
Die ID	22.5 [571 mm]	26.5 [672 mm]	30 [762 mm]	30 [762 mm]
Track Width	6.2 [157 mm]	7.1 [181 mm]	6.1 [156 mm]	8.3 [210 mm]
Die RPM (Motor RPM – 1800/1200)	262/174	190/126	190/126	190/126
Force feeder option	Yes	Yes	Yes	Yes

ANDRITZ Feed and Biofuel A/S
andrutz-fb.dk@andrutz.com
 p: +45 72 160 300 / andrutz.com/ft

ANDRITZ Feed and Biofuel USA
USA.andrutz-fb.us@andrutz.com
 p: +1 570 546 1253



All data, information, statements, photographs and graphic illustrations in this leaflet are without any obligation and raise no liabilities to or form part of any sales contracts of ANDRITZ AG or any affiliates for equipment and/or systems referred to herein. © ANDRITZ GROUP 2024. All rights reserved. No part of this copyrighted work may be reproduced, modified or distributed in any form or by any means, or stored in any database or retrieval system, without the prior written permission of ANDRITZ AG or its affiliates. Any such unauthorized use for any purpose is a violation of the relevant copyright laws. ANDRITZ AG, Stattegger Strasse 18, 8045 Graz, Austria.



7700 US